



Technical features



Cavity	(For dimensions see catalogue 17.000)	S 20/2
Max. flow	(l/min.)	50
Max. inlet pressure	(bar)	350
Max. pressure on line 2	(bar)	350
Fluid viscosity range	(cSt)	2.8 - 380
Fluid temperature range	(°C)	-20 +80
Mass	(kg)	0.125
Cracking pressure 95% of setting value		
Reset pressure 75% of setting value		
Cracking pressure defined with 1 l/min.		
Standard setting obtained with 10 l/min.		
Hydraulic fluid; mineral oil HM and HV ISO 6074		
Recommended filtration; 19/15 ISO 4466 (25 μ absolutes)		
Standard seals in Polyurethane and Buna N		

Dimensions

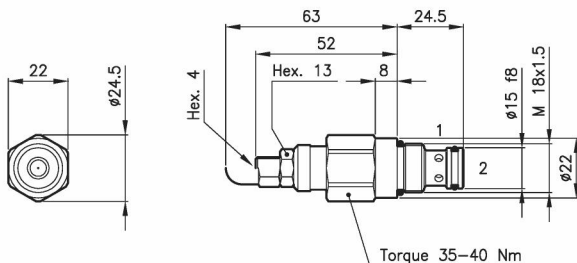

Ordering informations

LPB 20/D-N

LPB 20 = Valve type



Standard springs

Type	Setting range	Factory set
U	= 10 - 105 bar	70 bar
D	= 70 - 210 bar	140 bar
T	= 140 - 350 bar	280 bar

Adjustment type

N = Standard adjustment



NB = Cover Cap adjustment



(not available for setting range U type)

Codes:

LPB 20/U-N	21 011 107
LPB 20/D-N	21 011 108
LPB 20/T-N	21 011 109
LPB 20/D-NB	21 011 154
LPB 20/T-NB	21 011 155

External seals kit 90 620 100

LPB 20 valves can be assembled on standard bodies 20-L0 series; for dimensions see catalogue 16.010